PERFOTEK
INNOVATIVE PERFORANT PROOF TECHNOLOGY

07-002
SPECIFICATION SHEET

ANSI A9 CUT PALM

ANSI A4 CUT BACK OF HAND

ANSI/ASTM 4 F2878

EN388 4X44F

CE Oeko-Tex® Standard 100

ATTRIBUTES:

- 13g Dark Blue HDPE Liner W/ Puncture Resistant Fingertips
- Black HCT® MicroFoam Nitrile Palm Coating

FEATURES:

- Reinforced Thumb Crotch
- ANSI A9 Cut Resistance: Palm Side (Palm, Palm-Side Fingers, Palm-Side Thumb)
- ANSI/ASTM F2878 Level 4 Puncture Resistance: Palm Side (Palm, Palm-Side Fingers, Palm-Side Thumb, Fingertips)
- ANSI A4 Cut Resistance: Back of Hand, Wrist

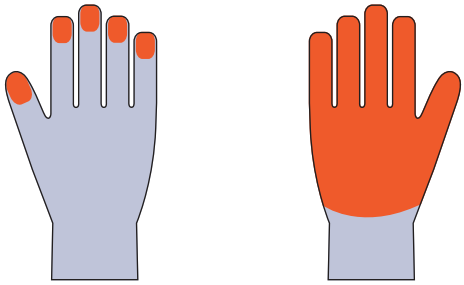

Back of Hand | Palm Side

- ANSI A9 Cut Resistance
- ANSI/ASTM F2878 Level 4 Puncture Resistance
- ANSI A4 Cut Resistance

SPECIFICATIONS:

- **Liner Materials:** 13g Dark Blue HDPE Liner
- **Coating Materials:** Black HCT® MicroFoam Nitrile
- **Wrist Design:** Continuous Knit
- **Origin:** PRC
- **Sizes:** S-XXL

Armor Guys Reference Number: 07-002

PACKAGING:

GLOVE SIZE	S	M	L	XL	XXL
CUFF COLOR	Red	Yellow	Brown	Black	Blue
PER CASE	5DZ	5DZ	5DZ	5DZ	5DZ
CASE WEIGHT	32.40/lbs	34.40/lbs	37.00/lbs	40.00/lbs	42.00/lbs

PERFORMANCE LEVEL:

EN388: 4X44F – EN Level 4 Cut Resistance

ABRASION	0	1	2	3	4	5	X
CUT	0	1	2	3	4	5	X
TEAR	0	1	2	3	4	5	X
PUNCTURE	0	1	2	3	4	5	X
CUT TDM TEST	A	B	C	D	E	F	X

APPLICATIONS:

- Recycling
- Trash Handling
- Mining
- Steel Manufacturing
- Wood Handling

CATEGORY:

- **Perfotek®**

CARE INSTRUCTIONS:

Recommended washing temperature is between 40°C and 60°C (104 - 140°F) with mild detergent.

The drying process may cause felting on the fabric surface. Drying temperatures should not exceed 70°C (158°F).

TECHNOLOGIES:

PERFOTEK INNOVATIVE PERFORANT PROOF TECHNOLOGY

HCT Hybrid Coating Technology

ARMOR GUYS · PROTECTED ·