



# SPECIFICATION SHEET

## 33-G115



### SEAMLESS KNIT POLYESTER GLOVE WITH POLYURETHANE COATING

- Seamless knit nylon for great dexterity
- Polyurethane coated palm and fingers for abrasion resistance
- Breathable back for comfort
- Pair packed for ease of distribution

### APPLICATIONS

- Electronic and computer assembly
- Quality control
- Inspection
- General assembly

### CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C).

### TECHNICAL DATA

|                 |   |                    |                  |                  |                  |                    |
|-----------------|---|--------------------|------------------|------------------|------------------|--------------------|
| MATERIAL        | Polyester with polyurethane coating on palm and fingers |                    |                  |                  |                  |                    |
| CONSTRUCTION    | Seamless Knit   |                    |                  |                  |                  |                    |
| COLOR           | Shell: ■ Gray / Coating: ■ Gray                         |                    |                  |                  |                  |                    |
| SIZES           | XS - XXL  |                    |                  |                  |                  |                    |
| PACKAGING       | 1 pair per bag, 12 pairs per dozen, 25 dozen per case   |                    |                  |                  |                  |                    |
| CASE DIMENSIONS | 24.8" x 11.0" x 18.1" / 63cm x 28cm x 46cm              |                    |                  |                  |                  |                    |
| CASE WEIGHT     | XS  | S                  | M                | L                | XL               | XXL                |
|                 | 14.2 lbs<br>6.4 kg                                      | 15.6 lbs<br>7.1 kg | 16 lbs<br>7.3 kg | 17 lbs<br>7.7 kg | 18 lbs<br>8.2 kg | 19.1 lbs<br>8.7 kg |
| COO             | China   |                    |                  |                  |                  |                    |

### PERFORMANCE PROPERTIES

**EN388: 3121** ASTM F2992-15 ANSI Cut Level A4 (Adopted by ANSI/ISEA 02/16)

|          |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|
| ABRASION | 0 | 1 | 2 | 3 | 4 | - |
| CUT      | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR     | 0 | 1 | 2 | 3 | 4 | - |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | - |


### BARCODES

| ITEM          | BAG | DOZEN          | CASE           |
|---------------|-----|----------------|----------------|
| ■ 33-G115/XS  | --- | 01616314124876 | 02616314124875 |
| ■ 33-G115/S   | --- | 01616314124852 | 02616314124851 |
| ■ 33-G115/M   | --- | 01616314124845 | 02616314124844 |
| ■ 33-G115/L   | --- | 01616314124838 | 02616314124837 |
| ■ 33-G115/XL  | --- | 01616314124869 | 02616314124868 |
| ■ 33-G115/XXL | --- | 01616314124883 | 02616314124882 |



### DIMENSIONS (in/cm)

|          | XS          | S         | M         | L         | XL        | XXL       |
|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| <b>A</b> | 8.46 / 21.5 | 9 / 23    | 9.4 / 24  | 9.8 / 25  | 10.2 / 26 | 10.6 / 27 |
| <b>B</b> | 3.5 / 9     | 3.6 / 9.2 | 3.7 / 9.5 | 3.8 / 9.8 | 4 / 10.2  | 4.3 / 11  |
| <b>H</b> | ■ Purple    | ■ Red     | ■ Yellow  | ■ Brown   | ■ Black   | ■ Blue    |

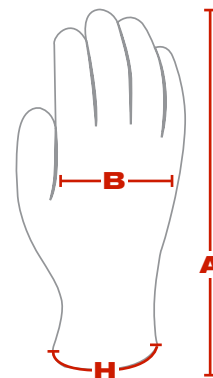

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.