


COVERALL

Highlight Feature:

- **Fit over** prescription eyewear
- **Latex free**
- **Ultra lightweight**
- **Autoclavable** for sterilization
 - 17 cycles at 250°F during 20 min
 - 20 cycles at 273°F during 10 min
- **D3 Rated** for Liquid Splash Protection
- **D4** for Dust protection

TECHNICAL DATA SHEET ANSI Z87.1-2010 CSA Z94.3-2007

- 99.99% UVA and UVB light absorption
- High impact lens, anti-fog/anti-scratch coated (depends on sku#)
- 6 base lens with 180 degree distortion free viewing and superior optical quality

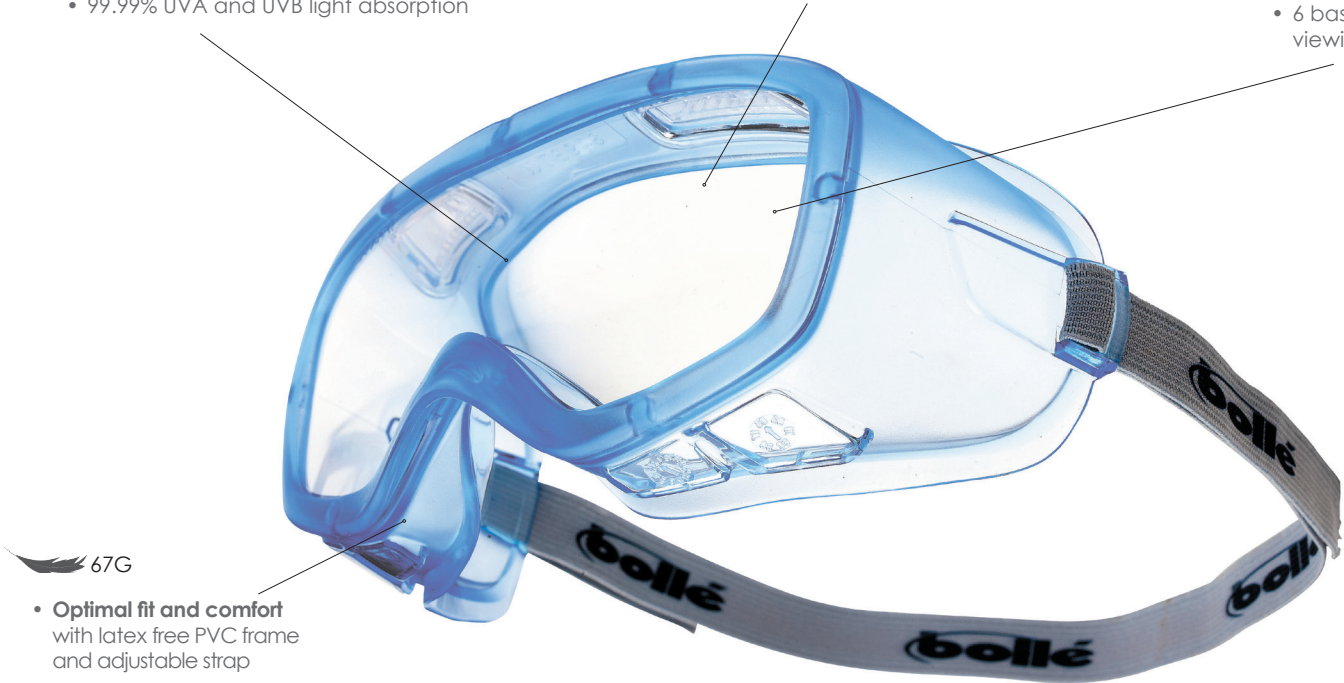

- **Optimal fit and comfort** with latex free PVC frame and adjustable strap



AUTOCLOAVE VERSION

LENS	COATING
 Clear Sealed Polycarbonate	Anti-scratch and Anti-fog
 Clear Ventilated Polycarbonate	Anti-scratch and Anti-fog
 Clear Autoclave Polycarbonate	NA

- Main Markets:**
- Janitorial
 - Construction
 - Healthcare/Laboratory
 - Medical
 - Manufacturing
 - Municipalities
 - Pharmaceutical

- Applications:**
- Liquid splash protection
 - Engineering
 - Process work
 - Cleaning Services

bollé
SAFETY

9200 CODY STREET
OVERLAND PARK, KS 66214-1734
(800) 262-7306



CHARACTERISTICS

LENS MATERIAL	Polycarbonate
LENS THICKNESS	1.5 mm
FRAME MATERIAL	PVC or Autoclave TPR
STRAP	Yes, adjustable



LENS VARIANTS	FRAME COLOR	COATING	ANSI Z87.1-2010 CSA Z94.3-2007 Lens Markings	ANSI Z87.1-2010 CSA Z94.3-2007 Temple Markings
Clear Sealed	Translucent Blue	Anti-scratch and Anti-fog	☞ Z87+U6	☞ Z87+D3 D4/Z94
Clear Ventilated	Translucent Blue	Anti-scratch and Anti-fog	☞ Z87+U6	☞ Z87+D3 D4/Z94
Clear Autoclave	White	NA	☞ Z87+D3 D4/Z94	☞ Z87+D3 D4/Z94

☞ MANUFACTURER MARK

SKU # and BAR CODES

LENS	SKU #	Individual Pack Quantity	INDIVIDUAL BAR CODE	Inner Pack Quantity	INNER PACK BAR CODE	Case Pack Quantity	CASE PACK BAR CODE
Clear Sealed Polycarbonate	40099	1	0-54917-27791-8	10	0-54917-31659-4	180	0-54917-31662-4
Clear Ventilated Polycarbonate	40100	1	0-54917-27792-5	10	0-54917-31660-0	180	0-54917-31663-1
Clear Polycarbonate Autoclave	40101	1	0-54917-27793-2	10	0-54917-31661-7	180	0-54917-31664-8