



# BULLHEAD SAFETY® HEARING PROTECTION

## Corded Polyurethane Foam Earplugs

### DESCRIPTION

These single-use foam earplugs provide simple, effective protection against hearing damage by greatly reducing environmental noise. Highly visible orange and shaped to conform to the ear canal, the soft, slow-recovery foam is rated for a protection level of NRR 33 dB.

Each pair is individually packaged in a polybag for retail sale.

### INDUSTRY

|               |                  |
|---------------|------------------|
| Airport Crews | Waste Management |
| Construction  | Transportation   |
| Automotive    | Manufacturing    |
| Printing      | Utility Work     |




ITEM **HP-F2**

NRR **33 DB**

### FEATURES

- Single-use disposable earplugs
- 100% PVC-free polyurethane foam
- Extra-soft, lightweight foam seals the ear canal without pressure
- Bullet shaped provides a snug fit while gently conforming to the ear canal
- Expandable, slow rebound foam provides the best combination of comfort and protection for most users
- Made of soft non-allergenic material

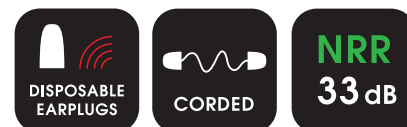

### SPECIFICATIONS

| MATERIAL                   | COLOR                     | SHAPE  | CORDED | METAL DETECTABLE | POLY BAGGED      | RETAIL READY | PAIRS/BOX |
|----------------------------|---------------------------|--------|--------|------------------|------------------|--------------|-----------|
| PVC-Free Polyurethane Foam | High-Visibility Orange    | Bullet | Yes    | No               | Individual Pairs | Yes          | 100       |
| ANSI S3.19-1974 NRR RATING | EN 352-2: 2002 SNR RATING |        |        |                  |                  |              |           |
| 33 dB                      | 36 dB                     |        |        |                  |                  |              |           |

#### ANSI S3.19-1974 SOUND ATTENUATION DATA:

| FREQUENCY (HZ)          | 125  | 250  | 500  | 1000 | 2000 | 3150 | 4000 | 6300 | 8000 | NRR   |
|-------------------------|------|------|------|------|------|------|------|------|------|-------|
| MEAN ATTENUATION (DB)   | 33.4 | 36.2 | 44.6 | 41.6 | 39.8 | 45.6 | 46.1 | 49.1 | 46.7 | 33 dB |
| STANDARD DEVIATION (DB) | 4.7  | 4.3  | 3.6  | 3.6  | 2.7  | 4.2  | 4.5  | 4.7  | 4.9  |       |

#### EN 352-2: 2002 SOUND ATTENUATION DATA:

| FREQUENCY (HZ)          | 63          | 125       | 250       | 500       | 1000 | 2000 | 4000 | 8000 |  |
|-------------------------|-------------|-----------|-----------|-----------|------|------|------|------|--|
| SOUND ATTENUATION (DB)  | 27.2        | 30.2      | 37        | 42.3      | 41.7 | 37.2 | 47.8 | 46.1 |  |
| STANDARD DEVIATION (DB) | 6.1         | 6.7       | 4.9       | 7.1       | 7.1  | 5.8  | 6.3  | 5.9  |  |
| ASSUMED PROTECTION (DB) | 21.1        | 23.5      | 32.1      | 35.2      | 34.6 | 31.4 | 41.5 | 40.2 |  |
|                         | SNR = 36 dB | H = 34 dB | M = 34 dB | L = 31 dB |      |      |      |      |  |

### PACKAGING

|                         | QUANTITY       | HP-F2          |
|-------------------------|----------------|----------------|
| EACH PAIR               | 1              | 810292029517   |
| INNER BOX               | 100 PAIRS/PACK | 10810292029514 |
| CASE                    | 10 PK/CASE     | 20810292029511 |
| CASE WEIGHT (IN POUNDS) |                | 12             |

13915 Radium St NW  
Ramsey, MN 55303

763-450-0110  
sales@BullheadSafety.com

BullheadSafety.com

