



# TRI-FLOW<sup>®</sup>

## Industrial Strength Lubricants

A Complete Line of Proven Formulas for Every Lubricating Need!

**EVERYTHING ELSE IS JUST A LUBE!**

Tri-Flow<sup>®</sup> Lubricants are ideal for preventive and corrective maintenance in industrial applications. Tri-Flow will keep equipment in service longer and reduce costly breakdowns caused by worn and grimy parts.

Tri-Flow's unique coating action fills in surface irregularities with a combination of premium petroleum oils, micronized P.T.F.E. and extreme pressure additives which act to keep the P.T.F.E. in place for long-lasting lubrication. In addition, Tri-Flow contains penetrating aids, moisture displacers and corrosion inhibitors for added performance.





# INDUSTRIAL LUBRICANTS WITH P.T.F.E

Tri-Flow® is a unique concentrate formula containing micron-sized particles made from P.T.F.E. Tri-Flow deposits a long-lasting film to greatly reduce friction and wear. It cleans and provides a "protective shield" that inhibits formation of rust and other corrosive buildup that damages working mechanisms. Tests prove Tri-Flow outperforms other leading lubricants. Now this proven formula is available in our new Pin Point Lubricator!



- ▼ Single Drop Precision
- ▼ Lubricates
- ▼ Penetrates
- ▼ Protects

This unique, premium product, formulated with 14 high quality ingredients, is unmatched in performance and versatility.

With micronized P.T.F.E., high-grade petroleum oils, corrosion inhibitors, moisture displacers, cleaners, penetrators and extreme pressure additives, there's very little that Tri-Flow cannot do.

## Pin Point Lubricator Pen

- Apply a single drop with pin point accuracy
- Perfect for areas needing precise lubrication
- Safe on metal, wood, plastic and rubber
- Dramatically reduces friction and wear on moving parts
- Refillable
- Equipment works smoother, quieter, longer
- Non-staining
- Withstands temperature extremes, salt spray, and high humidity
- Loosens rusted parts, washes away dirt, corrosion and contaminants



### For use on:

- Chains
- Door hinges
- Electronic motor bearings
- Cables
- Nuts and bolts
- Machine rollers
- Linkages
- Locks
- Any moving parts
- Firearms
- Windows and sashes

| Stock No. | Description                                       | NSF Reg. # | NSF Rating | Case Pack |
|-----------|---|------------|------------|-----------|
| TFBC20027 | Pin Point Lubricator Blister Card                 | 127544     | H2         | 12        |
| TFPN20028 | Pin Point Lubricator – Pen with Self Merchandiser | 127544     | H2         | 12        |
| TF75452   | 1/4 oz. Tube - (Refill)                           | N/A        | –          | 50        |



**TFBC20027**  
Pin Point Pen  
Blister Card



**TFPN20028**  
Pin Point Pen  
Cylinder 12 pk.

# INDUSTRIAL LUBRICANTS WITH P.T.F.E. CONT.

- ▼ NSF Registered, H2 Rated
- ▼ Lubricates
- ▼ Penetrates
- ▼ Protects

- Penetrates inaccessible areas to displace contaminants
- Lubricates with oils, additives and P.T.F.E. to reduce friction and increase part life
- Protects against moisture and corrosion damage; displaces moisture to prevent icing; inhibits rust formation and corrosive build-up
- Rejects dirt, dust, sand and other abrasive particles
- Resists rust and corrosion, even under extreme conditions
- Effective from -60°F to 475°F
- Keeps equipment running longer
- Reduces costly breakdowns caused by worn and grimy parts
- NSF registered, H2 rated

### For use on:

- |                          |                   |
|--------------------------|-------------------|
| • Cables                 | • Nuts and bolts  |
| • Ball and socket joints | • Air power tools |
| • Control cables         | • Conveyors       |
| • Cutting tools          | • Drive chains    |
| • Electric power tools   | • Gears           |
| • Glides                 | • Hinges          |
| • Linkages               | • Precision tools |
| • Rollers                | • Taps            |
| • Dies and valves        | • Bearings        |

## Aerosol



**TF20025**  
6 oz. Aerosol



**TF20027**  
12 oz. Aerosol

## Non-Aerosol

Photo  
enlarged for  
representation  
only.



**TF75452**  
1/4 oz. Tube



**TF21010**  
2 oz.  
Non-Aerosol



**TF0021060**  
6 oz.  
Non-Aerosol

| Stock No. | Description                   | NSF Reg. # | NSF Rating | Case Pack |
|-----------|-------------------------------|------------|------------|-----------|
| TF20009   | Aerosol – 4-oz.               | 127540     | H2         | 12        |
| TF20025   | Aerosol – 6-oz.               | 127540     | H2         | 12        |
| TF20027   | Aerosol – 12-oz.              | 127540     | H2         | 12        |
| TF21010   | Non-Aerosol Bottle – 2-oz.    | 127544     | H2         | 12        |
| TF0021060 | Non-Aerosol Bottle – 6-oz.    | 127544     | H2         | 12        |
| TF22025   | 55-gallon                     | 127544     | H2         |           |
| TF26020   | Non-Aerosol – 1-gallon        | 127544     | H2         | 2         |
| TF29200   | Trigger Spray Bottle – 18-oz. | 127544     | H2         | 6         |
| TF75452   | 1/4-oz. Tube                  | NA         |            | 50        |



**TF26020**  
1 gal.  
Non-Aerosol



**TF29200**  
18 oz.  
Trigger Spray



# INDUSTRIAL LUBRICANTS WITH P.T.F.E CONT.

- ▼ NSF Registered, H1 Rated
- ▼ Protects Up to 1800°F
- ▼ Prevents Rust & Corrosion

Tri-Flow® Food Grade Anti-Seize products are NSF registered and H1 rated. They are a premium, synthetic, food grade, non-drying thread sealant and anti-seize compound. These products are formulated with P.T.F.E. and other lubricating solids, blended into a non-melting grease carrier. Other benefits include: protects up to 1800°F; leak proof seal; prevents rust, corrosion, galling and seizing; chemical and stain resistant; and reduces torque.

## Food Grade Anti-Seize

### For use on:

- Brass
- Black iron
- Galvanized steel
- Stainless steel
- Aluminum
- Copper
- Fiberglass reinforced pipes
- PVC

| Stock No. | Description                        | NSF Reg.# | NSF Rating | Case Pack |
|-----------|------------------------------------|-----------|------------|-----------|
| TF23015   | Food Grade Anti-Seize – 9 oz. Jar  | 128182    | H1         | 12        |
| TF23016   | Food Grade Anti-Seize – 18 oz. Jar | 128182    | H1         | 12        |
| TF23017   | Food Grade Anti-Seize – Aerosol    | 129462    | H1         | 12        |



TF23015  
9 oz. Jar


TF23016  
18 oz. Jar

TF23017  
12 oz. Aerosol

## Citrus Cleaner & Degreaser

- Powerful foaming action
- Cleans grease, dirt and oil
- Biodegradable

| Stock No. | Description                        | NSF Reg.# | NSF Rating | Case Pack |
|-----------|------------------------------------|-----------|------------|-----------|
| TF23002   | Citrus Degreaser, Aerosol – 14-oz. | 128469    | C1         | 6         |

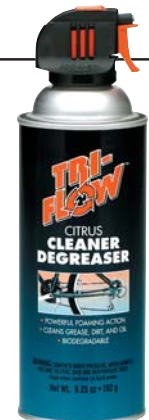

TF23002  
14 oz. Aerosol

## Dry Lubricant

- Repels dust and grime
- Same great performance as the Industrial Lubricant in a dry film technology

| Stock No. | Description                        | NSF Reg.# | NSF Rating | Case Pack |
|-----------|------------------------------------|-----------|------------|-----------|
| TF21013   | Dry Lubricant, Non-Aerosol – 2-oz. | N/A       | NA         | 12        |



TF21013  
2 oz. Dry Lubricant  
Non-Aerosol



Take a lubricant that can handle the toughest industrial applications. Then make it food grade approved for above table work in food and beverage operations.

Sound impossible? Not anymore. Enter Tri-Flow Oils and Greases. These P.T.F.E.-fortified products, both NSF registered, H1 rated and Kosher-approved, are specifically formulated to lubricate and seal out water in the most demanding conditions. So, trust Tri-Flow Food Grade, Oils and Greases for superior lubricity and unrivaled high-load protection.

Photo enlarged for representation only.



**TF75454**  
1/4 oz Tube



**TF23004**  
3 oz. Tube



**TF22020**  
11.25 oz. Aerosol



**TF22021**  
14 oz. Cartridge

# SYNTHETIC FOOD GRADE GREASE

- ▼ NSF Registered, H1 Rated
- ▼ Waterproof
- ▼ Non-Staining
- ▼ Biodegradable

Tri-Flow® offers a premium pure synthetic grease with P.T.F.E. that can be used in numerous applications and therefore reduces the need to stock specialized greases.

- Twice as much load-carrying capacity as the leading food grade grease (based on Timken OK load tests)
- Nearly 50% more P.T.F.E. than other leading food grade P.T.F.E. lubricants
- Wide temperature range: -10°F to 400°F
- Compatible with most rubbers and plastics; excellent for "O" rings
- Pure synthetic for added durability and long-lasting performance
- Kosher approved
- Available in N.L.G.I. Grades 0, 1 and 2

### For use on:

- Gaskets and "O" rings
- Can seamers
- Sterilizer chains
- Electric motors
- Pump bearings
- Universal joints
- Pool equipment
- Water filters
- Bushings
- Conveyors
- Slides
- Valves

| Stock No. | Description       | NLGI Grade | NSF Reg. # | NSF Rating | Case Pack |
|-----------|-------------------|------------|------------|------------|-----------|
| TF22002   | 5-gallon pail*    | 0          | 127524     | H1         | 1         |
| TF22003   | 15-gallon keg*    | 0          | 127524     | H1         | 1         |
| TF22004   | 55-gallon drum*   | 0          | 127524     | H1         | 1         |
| TF22012   | 5-gallon pail*    | 1          | 127524     | H1         | 1         |
| TF22013   | 15-gallon keg*    | 1          | 127524     | H1         | 1         |
| TF22014   | 55-gallon drum*   | 1          | 127524     | H1         | 1         |
| TF22020   | 11.25-oz. aerosol | 2          | 127510     | H1         | 12        |
| TF22021   | 14-oz. cartridge  | 2          | 127508     | H1         | 30        |
| TF22022   | 5-gallon pail*    | 2          | 127524     | H1         | 1         |
| TF22023   | 15-gallon keg*    | 2          | 127524     | H1         | 1         |
| TF22024   | 55-gallon drum*   | 2          | 127524     | H1         | 1         |
| TF23004   | 3-oz tube         | 2          | 127524     | H1         | 6         |
| TF75454   | 1/4-oz. tube      | 2          | 127524     | H1         | 50        |

\* Non-stocked items; allow one week lead time.



# SYNTHETIC FOOD GRADE OIL

- ▼ NSF Registered, H1 Rated
- ▼ Waterproof
- ▼ Biodegradable

As a compatible oil, Tri-Flow® offers a totally synthetic lubricating fluid fortified with P.T.F.E. for increased lubricity. This product is ideal for use in food processing plants where incidental food contact may occur.

- Includes P.T.F.E. for added lubricity
- Does not emulsify with water
- Biodegradable
- Clear, non-staining
- Kosher approved

### For use on:

- Pumps
- Gear boxes
- Bearings
- Hydraulic systems
- Motors
- Chains
- Conveyors
- General purpose lubrication

| Stock No. | Description                          | NSF Reg. # | NSF Rating | Case Pack |
|-----------|--------------------------------------|------------|------------|-----------|
| TF23010   | 12-oz. aerosol (ISO Grade 68)        | 127509     | H1         | 12        |
| TF23011   | 1-gallon non-aerosol (ISO Grade 68)  | 127512     | H1         | 4         |
| TF23012   | 5-gallon pail* (ISO Grade 68)        | 127512     | H1         | 1         |
| TF23013   | 15-gallon keg* (ISO Grade 68)        | 127512     | H1         | 1         |
| TF23014   | 55-gallon drum* (ISO Grade 68)       | 127512     | H1         | 1         |
| TF75453   | 1/4-oz. tube (ISO Grade 68)          | 127512     | H1         | 50        |
| TF23021   | 1-gallon non-aerosol (ISO Grade 220) | 127515     | H1         | 6         |
| TF23022   | 5-gallon pail* (ISO Grade 220)       | 127515     | H1         | 1         |
| TF23023   | 15-gallon keg* (ISO Grade 220)       | 127515     | H1         | 1         |
| TF23024   | 55-gallon drum* (ISO Grade 220)      | 127515     | H1         | 1         |

\*Non-stocked items; allow one week lead time.

### Upon request, oils available in the following ISO grades (NO aerosols)

| 1-gallon Stock No. | 5-gallon Stock No. | 15-gallon Stock No. | 55-gallon Stock No. | ISO     | NSF Reg. # | NSF Rating |
|--------------------|--------------------|---------------------|---------------------|---------|------------|------------|
| TF23032            | TF23033            | TF23034             | TF23035             | ISO 22  | 127523     | H1         |
| TF23042            | TF23043            | TF23044             | TF23045             | ISO 32  | 127521     | H1         |
| TF23052            | TF23053            | TF23054             | TF23055             | ISO 100 | 127520     | H1         |
| TF23062            | TF23063            | TF23064             | TF23065             | ISO 150 | 127516     | H1         |
| TF23072            | TF23073            | TF23074             | TF23075             | ISO 460 | 127518     | H1         |
| TF23082            | TF23083            | TF23084             | TF23085             | ISO 46  | 127522     | H1         |

TF23014  
55 gal. Drum

TF23013  
15 gal. Keg



Photo enlarged for representation only.



TF75453  
1/4 oz. Tube

T23021  
1 gal.  
Non-Aerosol

TF23012  
5 gal. Pail

TF23010  
12 oz. Aerosol

# HIGH PERFORMANCE RED GREASE LUBRICANT

- ▼ **N.L.G.I. No. 2**
- ▼ **Waterproof**
- ▼ **High-Melting Point**

Waterproof Formulation Provides an Excellent Seal on Bearings! Tri-Flow® High Performance Red Grease is a premium quality, extreme pressure, multi-purpose aluminum complex grease. Outstanding performance in high temperature applications and excellent water resistance.

- Waterproof
- High-melting point
- Maximum lubrication
- N.L.G.I. No. 2
- Resists oxidation & corrosion resistant
- High-load carrying capacity
- Excellent seal on bearings

| Stock No. | Description   | Rating         | Case Pack |
|-----------|---|----------------|-----------|
| TFBP20030 | 6.25 oz. Red Grease Barrier Pack                              | N.L.G.I. No. 2 | 12        |
| TFCC20029 | High Performance Red Grease & Pin Point Lubricator Combo Card | N.L.G.I. No. 2 | 6         |

*See page 2 for Pin Point Lubricator information.*

Two Tri-Flow® Premium Products Merchandised on One Convenient, Peg-Hook Card.

### For use on:

- Automotive disc brakes
- Motorcycles
- Bearings
- Flexible couplings
- Water pumps
- Electric motors
- Bicycles
- Skateboards
- Exercise equipment



**TFBP20030**  
6.25 oz



**TFCC20029**  
.75 oz Red Grase / .25 fl. oz. Pin Point Lubricator Combo Card

# RAPID CLEAN DRY DEGREASER

- ▼ **High Delivery Trigger Spray**
- ▼ **Fast Evaporating**


Tri-Flow® Rapid Clean™ Dry Degreaser is a premium formula with an attached high velocity trigger valve that blasts away dirt, mud, grease, and oil. Leaves no contaminant-attracting residue or chlorinated solvent run off. Cleans surface and degreases quickly.

- Fast evaporating
- No residue, No rinsing
- High velocity, precision valve, blasts away dirt and debris
- Quickly dissolves oil, grease, grime, and wax
- Cleans and degreases
- Contains no chlorinated solvents
- Meets VOC regulations

| Stock No. | Description                     | Case Pack |
|-----------|---------------------------------|-----------|
| TF0023008 | 15oz. Rapid Clean Dry Degreaser | 6         |

### For use on:

- Bikes/Motorcycles
- Skates/boards
- Linkage
- Firearms
- Chains
- Cables
- Fishing reels
- Sewing Machines
- Nuts/Bolts
- Brake Shoes
- Caliper Discs
- Machines
- All-Purpose Parts Cleaning



**TF0023008**  
15 oz



Krylon Products Group  
Cleveland, OH 44115  
www.KPG-Industrial.com

©2006 Krylon Products Group

Made in the USA

TF-043 Rev (7/06)