SPECIFICATION SHEET
939-AT293

E-FLARE
SAFETY & EMERGENCY BEACON

- Intensely Bright - Can be clearly seen over ¾ mile away without night vision, point fixation and distance judgement problems
- Lightweight - Weighs under 2/3 lb with batteries
- Simple to Use - An improved switching mechanism involves a simple twist of the lens to the desired function
- Durable - Waterproof (up to 100 ft), dust proof, and will survive a 3-foot drop onto a concrete surface
- Double the Safety - Provides safety with maximum 360° visibility. Unlike pyrotechnic flares, there is no risk of fire, explosion, toxic fumes or residue
- Infinitely Versatile - Easily attaches to belts, clothing, vehicles, traffic cones or signs
- Place units around to create a highly visible warning and safety zone for people, work areas, hazards and accidents
- HAZMAT accredited for use in Class 1, Division 2/ Zone 2 hazardous areas



APPLICATIONS


- Police
- Rail & Port
- Traffic Control
- Warehousing & Factory
- Construction Sites
- Other public safety applications

TECHNICAL DATA

OPERATION	Dual Flashing, 2-Color
CONSTRUCTION	Body: Lime-Yellow ABS plastic Fresnel Lens: Polycarbonate
BEACON COLOR	Red & White (-R/W) Blue & White (-B/W) Amber & White (-A/W) Red & Blue (-R/B) Red & Amber (-R/A)
LIGHT INTENSITY	4 + 4 high luminosity LED's
FLASH RATE	165-185 fpm
MAX BEAM CONSPICUITY	Between horizontal and 10 degrees above horizontal
BATTERIES REQUIRED	4 "AA" Alkaline batteries (Energizer® or Duracell® required for accreditation)
BATTERY LIFE	20+ hours
PACKAGING	1 per bag, 12 per case
EACH WEIGHT	0.65 lbs / 0.45 kg (with batteries installed)
CASE WEIGHT	5.2 lbs / 2.4 kg (batteries not included)
COO	China

DIMENSIONS (in/cm)

	ONE SIZE				
A	8.0 / 20.3				
B	1.6 / 4.0				

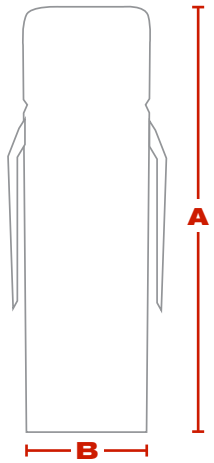

BARCODES

ITEM	EACH	CASE
939-AT293-A/W	616314186790	01616314186799
939-AT293-B/W	616314186806	01616314186805
939-AT293-R/A	616314186813	01616314186812
939-AT293-R/B	616314186820	01616314186829
939-AT293-R/W	616314186837	01616314186836

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.

PROTECTIVE INDUSTRIAL PRODUCTS
www.pipusa.com • sales@pipusa.com • (800) 262-5755 • (518) 864-0144 fax