



KRYLON® INDUSTRIAL OVERHEAD MARKING PAINT

The Easy Way to Mark Overhead Surfaces

- Mine marking, excavation & bridge marking
- Fluorescent colors
- Fast drying
- Low odor



CLEANERS, DEGREASERS
LUBES AND SEALANTS

SUPERIOR
LUBRICANTS

PAINTS, COATINGS
AND PRIMERS

CAULKS, SEALANTS
AND ADHESIVES

BRUSHES, ROLLER COVERS
AND ACCESSORIES

Krylon® Industrial Overhead Marking Paint sprays in an upright position, dries fast and is a low odor formula. Penetrates and clings to uneven surfaces. These high solids, water based colors give four times greater visibility than conventional paints.

For use in: Marking mines, underground utilities, construction, excavation sites and bridges.



COLOR SELECTION GUIDE

FLUORESCENT



K04001000 Red



K04003000 Orange



K04005000 Green

PROPERTIES

RESIN TYPE: VT Alkyd

PROPELLANT: Hydrocarbon

SHEEN: Flat

NET WEIGHT: 17 oz.

CASE PACK: 12

DRYING TIME @ 70°F @ 50% R.H.:

TO TOUCH: > 10 minutes

TO HANDLE: N/A

RECOAT: Anytime

VOC/MIR: Compliant - VOC 54.4%

1.15 per C.A.R.B. Method 310

FLASH POINT: < 0°F

RECOMMENDED FILM

THICKNESS: 1.5 mils

COVERAGE PER AEROSOL

(THEORETICAL): @ 1 mil film thickness:

332 linear ft (2")

17 oz Net wt (Theoretical): 664 linear ft (1")

DRY HEAT RESISTANCE: 120°F

GAS & OIL RESISTANCE: No

CLEAN UP: Mineral Spirits

SHELF LIFE: 36 months

SURFACE PREPARATION

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

APPLICATION

Remove dirt, grease, wax, moisture, rust, and loose paint from surface. Scuff-sand rusted, glossy or hard surfaces. Prime base or rusted metal. Protect adjacent areas from overspray. Use when can is between 40 degrees to 90 degrees Fahrenheit. Shake can vigorously for one minute after mixing ball rattles and occasionally during use. With can in upright position, press the sprayhead to the side and spray 8" to 10" from surface.

PACKAGING

Part #: K04001000

UPC Code: 075577040681

Color: Fluorescent Red

Part #: K04003000

UPC Code: 075577040698

Color: Fluorescent Orange

Part #: K04005000

UPC Code: 075577040704

Color: Fluorescent Green

CARTON DIMENSIONS:

L 8.44" x W 5.75" x H 10"

RESOURCES

MSDS/EDS/PRODUCT DATA

SHEETS: www.paintdocs.com


CUSTOMER SERVICE:

1-800-777-2966

TECHNICAL INFORMATION:

1-800-251-2486

WEB SITE: www.KPG-Industrial.com

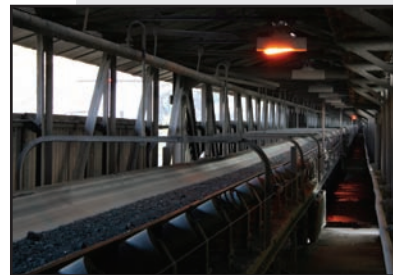

Krylon® Industrial Overhead Marking Paint is great for use in marking mines, underground utilities, construction, excavation sites and bridges.

Distributed By:



INDUSTRIAL

Krylon Products Group

101 Prospect Ave. NW

Cleveland, OH 44115

www.KPG-Industrial.com

Tel: 1-800-777-2966