



9672DT2

Cut Protection Specification Sheet

PRODUCT DESCRIPTION:

DSM Dyneema® is a high modulus polyethylene (HMPE) fiber available as a continuous filament, spun or engineered fiber (yarn). DSM Dyneema® is 15 times stronger than surgical steel and features excellent abrasion resistance, cut resistance, and comfort. The 9672DT2 includes an 18 gauge DSM Dyneema® Diamond Technology shell with a gray polyurethane (PU) palm and forefinger coating. It is one of the coolest and most comfortable cut resistant offerings.

FEATURES:

- 18 Gauge Dyneema® Diamond Technology shell
- Breathable shell for maximum comfort
- Gray PU coating
- Color coded hem sizing for easy identification
- Cool and Comfortable

APPLICATIONS:

Assembly Line Production, Automotive Assembly, Carpentry, Construction, Demolition, Glass handling, Janitorial, Material Handling, Recycling, Salvage



TECHNICAL DATA FOR: 9672DT2

Material Group	Synthetic
Product Type	Cut Protection
Glove Size	Large
Gauge	18 Gauge
Material	Dyneema
Features	Sold by pair
Made In	China,Sri Lanka,Pakistan,Taiwan


EN 388: CE Score - Abrasion	2
EN 388 : CE Score - Cut	2
EN 388 : CE Score - Tear	4
EN 388 : CE Score - Puncture	2
ANSI Cut	A2
ANSI Puncture	2
ANSI Abrasion	3



MCR
SAFETY

9672DT2

Cut Protection Specification Sheet

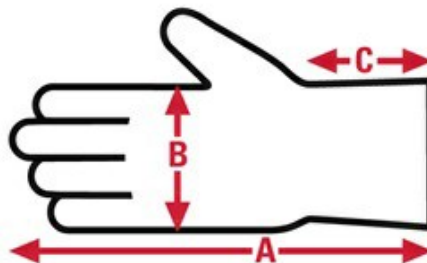

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
9672DT2XL	X - Large	10.44	3.94	2.76	14.112 lb.	0.098
9672DT2M	Medium	9.64	3.74	2.36	12.384 lb.	0.086
9672DT2XXL	XX - Large	11.02	3.94	2.95	15.984 lb.	0.111
9672DT2S	Small	9.05	3.54	2.36	11.664 lb.	0.081
9672DT2L	Large	9.85	3.74	2.56	13.680 lb.	0.095

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2020 MCR Safety - All Rights Reserved