


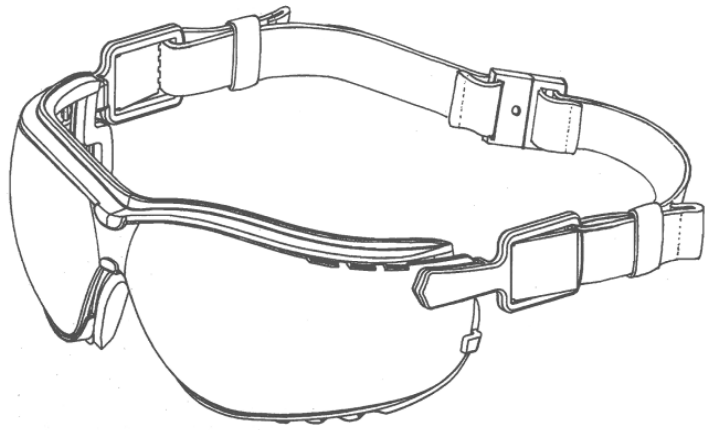

V2G™ (#5080)

SPECIAL FEATURES:

- 9.75 base curved lens provides full side protection
- Lenses are treated to prevent fogging and self-cleaning
- Lens and Frame are vented to increase airflow.
- Headband features ratchet adjustment for perfect fit.
- Foam padding forms a perfect seal to keep out dust and airborne particles.
- Headband features quick fit retainer.
- Lenses provide 99% protection against harmful UV rays.
- Interchangeable temples/headband included with each pair of V2G™

GENERAL SPECIFICATIONS:

Lens thickness:	2.1mm	PD:	68mm
Lens Base:	9.5 curve	Weight:	38gm
Lens size vertical:	54mm	Lens size diagonal:	81.1mm
Bridge:	15mm	Overall length (lens-tip):	81mm
Overall Width:	143mm	Closest point between lens:	9.5mm
Strap Length:	443mm	Closest point between temple tips:	146mm

FRAME AND LENS OPTIONS:

- Black Frame
 - o Clear, Gray, and I/O mirror

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9.5 base Single lens
Body	Nylon	Flexible fitting body with 6 ventilation holes anti-flammability sponge
Parts	Nylon	Clip on frame
Nose piece	Nylon	Universal, integral to frame
Headband	Polyester	Adjustable quick-released textile elastic fixed on clipping parts

MARKINGS:

Lens: As per Specification


Frame: As per Specification

PACKAGING:

1 pc in a PP bag; 12 pcs per inner box; 300 pcs in an outer carton

STANDARDS:

ANSI, CE, and CSA

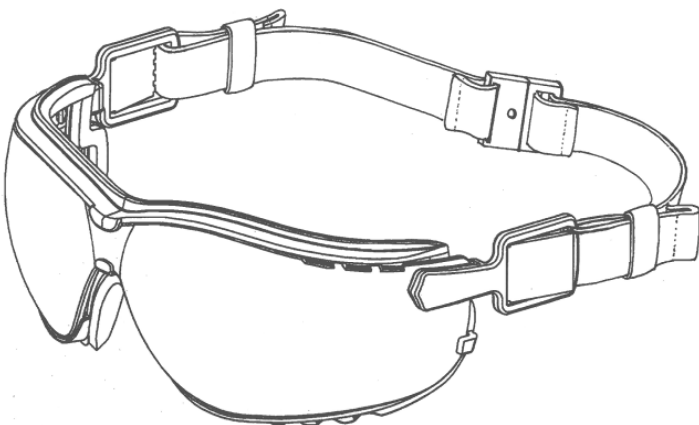PRODUCT FILE V2G (#5080)		
GENERAL SPECIFICATIONS (mm)		
Lens thickness: 2.1mm		
PD: 68mm		
Lens Base: 9.5 curve		
Weight: 38gm		
Lens size vertical: 54mm		
Lens size diagonal: 81.1mm		
Bridge: 15mm		
Overall length (lens-tip): 81mm		
Overall Width: 143mm		
Closest point between lens: 9.5mm		
Closest point between temple tips: 146mm		
Strap Length: 443mm		
COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9.5 base Single lens
Body	Nylon	Flexible fitting body with 6 ventilation holes anti-flammability sponge
Parts	Nylon	Clip on frame
Nose piece	Nylon	Universal, integral to frame
Headband	Polyester	Adjustable quick-released textile elastic fixed on clipping parts
FRAME AND LENS OPTIONS		
Frame colors:		Black
Lens options:		Clear, Gray, and I/O mirror
SPECIAL FEATURES		
* Best protection against dust entry * Optically correct polycarbonate lens * Pliable facial contours and universal bridge for a close fit * Impact resistance against flying particles * Soft frame body with two side vents * Indirect ventilation allows air movement whilst protecting against dust		
MARKINGS		PACKAGING
Lens	As per Specification	1 pc in a PP bag
Frame		12 pcs per inner box
APPROVALS		300 pcs in an outer carton
Certificate	-	
Meet	ANSI, CE, and CSA	